

- They can all have rubber anti-slip pad
- From 80mm up base can be drilled for bolting down option
- Base dimensions are: 40-50-65-83-103-123
- Standard Metric sizes are: M8-M10-M12-M14-M16-M20-M24-M30
- Screw lengths available are: 25-50-75-100-125-150-175-200-225-250

MINI LINE



STAINLESS STEEL SERIES



30° Series

30° Articulation



Medium Load Series

5° Articulation

Standard



With holes bolting down option (rubber pad option)



Vulcanized Series

10° Articulation

Standard



With 1 hole for bolting down option



Heavy Load Series

0°-10° Articulation

Screw turns inside the base (10° Articulation)



Screw does not turn inside the base. (Fixed Screw)

Standard (Fixed)



With holes for bolting down option (Fixed)



Teknoclean Series


10° Articulation

Standard



With holes for bolting down option

Accessories and Supports

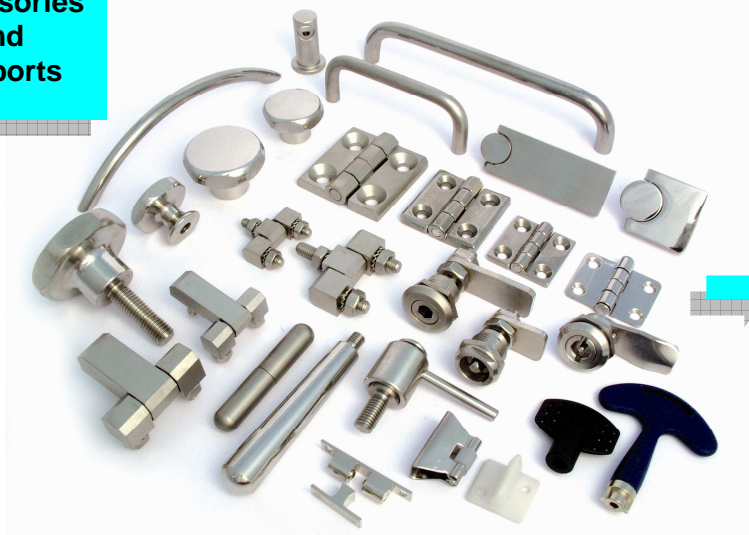

- . Supports
- . Hinges
- . Knobs
- . Handles
- . Closing Systems

STEEL SERIES



30° Series

30° Articulation



Anti-Vibration

Medium Load Series

5° Articulation

Standard



With holes for bolting down option (rubber pad option)



Vulcanized Series

10° Articulation

Standard



With 1 hole for bolting down option



Heavy Load Series

0°-10° Articulation

Screw turns inside the base (10° Articulation)



Screw does not turn inside the base. (Fixed Screw)

Standard (Fixed)




With holes for bolting down option (Fixed)



Teknofix Series

Fixed/Tilted/Articulated

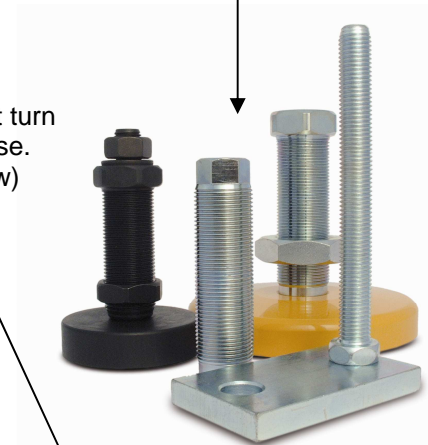

- . Teknoeasy
- . Teknopress
- . Teknoplus
- . Painted
- . Steel
- . Inox
- . Antimoving
- . Silent Blocks

Pressed Line

